

DOPIO POLE

Architectural Outdoor Bollard Luminaire

LAMPETI
L I G H T I N G

Power

40 - 80W

CRI

>80

Material

Aluminum Body

Input Voltage

220-240V AC

Light Distribution

150°

Finish

Electrostatic Powder Coating

LED Type

Nichia-Osram

Optics

Asymmetric

Operating Temperature

-20° / +50°

Luminous Flux

5580 lm

IP Rating

IP65

Typical spacing

10-12 m


IK Rating

IK08

Color Temperature

3000K / 6500K


Polar Light Distribution

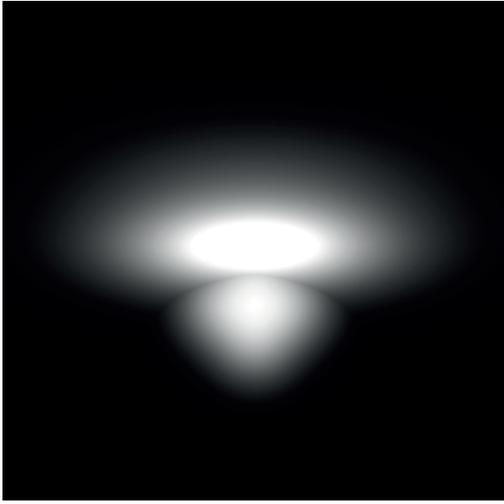

Photometric files (.ldt / .ies) available upon request

	Model Kodu	Aydınlatma	Watt	Ölçüler
	DPO 31161	LED	40W	800(A) x 200(B) x 4000(C)
	DPO 31162	LED	80W	1400(A) x 200(B) x 4000(C)

· A ·



·B·

