

# DORIK POLE

Architectural Outdoor Bollard Luminaire

**LAMPETI**  
L I G H T I N G

**Power**  
40-50 W

**CRI**  
>80

**Material**  
Aluminum Body

**Input Voltage**  
220-240V AC

**Light Distribution**  
360°

**Finish**  
Electrostatic Powder Coating

**LED Type**  
Nichia-Osram

**Optics**  
PMMA

**Operating Temperature**  
-20° / +50°

**Luminous Flux**  
5132 - 6414 lm


**IP Rating**  
IP65

**Typical spacing**  
8-10 m


**IK Rating**  
IK08

**Color Temperature**  
3000K / 4000K

## Polar Light Distribution

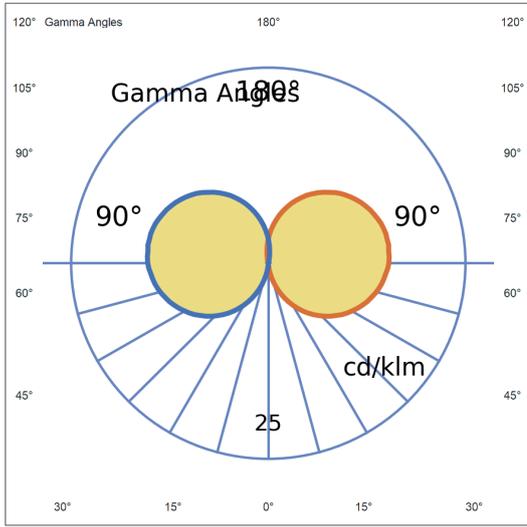

Photometric files (.ldt / .ies) available upon request

	Model Kodu	Aydınlatma	Watt	Ölçüler
	DRK 3114	LED	40W	125(A) X 3000(B)
	DRK 3115	LED	50W	150(A) X 4000(B)

