

LATUS POLE

Architectural Outdoor Bollard Luminaire

LAMPETI
L I G H T I N G

Power

40 W

CRI

>80

Material

Aluminum Body

Input Voltage

220-240V AC

Light Distribution

150°

Finish

Electrostatic Powder Coating

LED Type

Nichia-Osram

Optics

Asymmetric

Operating Temperature

-20° / +50°

Luminous Flux

5580 lm

IP Rating

IP65

Typical spacing

10-12 m




IK Rating

IK08

Color Temperature

3000K / 6500K

Polar Light Distribution

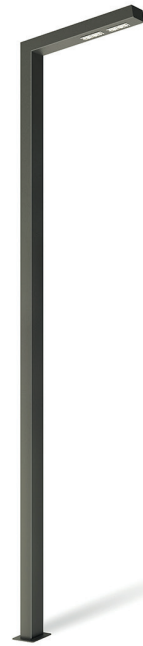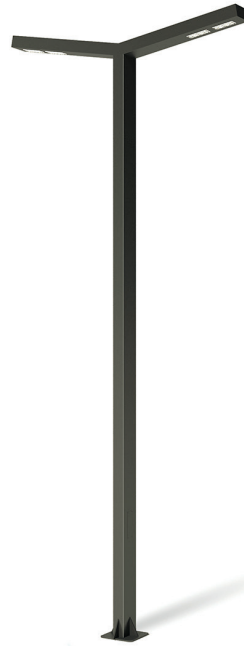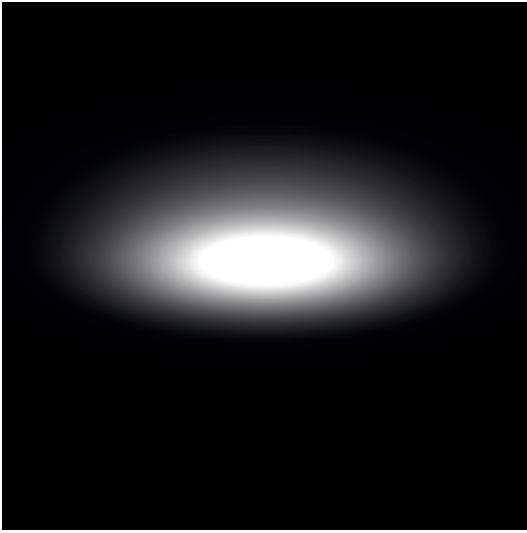

Photometric files (.ldt / .ies) available upon request

	Model Kodu	Aydınlatma	Watt	Ölçüler
	LTS 3116	LED	40W	1000 x 150 x 4000
	LTS 3126	LED	40W + 40W	2080 x 150 x 4000

