

MIRKET BOLLARD

Architectural Outdoor Bollard Luminaire

LAMPETI
L I G H T I N G

Power

10 W

CRI

>80

Material

Aluminum Body

Input Voltage

220-240V AC

Light Distribution

150°

Finish

Electrostatic Powder Coating

LED Type

Nichia LED

Optics

Asymmetric

Operating Temperature

-20° / +50°

Luminous Flux

1394 - 2260 lm

IP Rating

IP65

Typical spacing

3-4 m


IK Rating

IK08

Color Temperature

3000K / 4000K

Polar Light Distribution

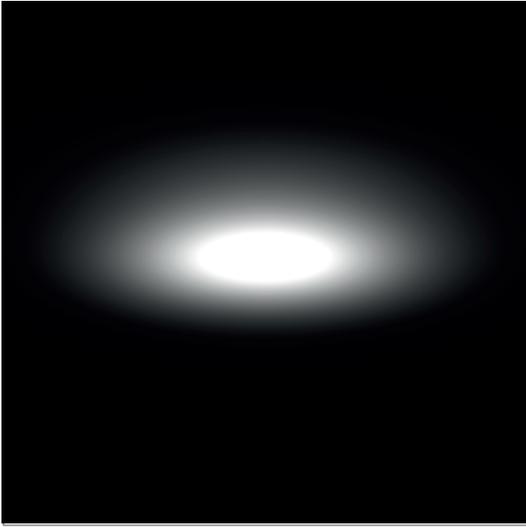

Photometric files (.ldt / .ies) available upon request



	Model Kodu	Aydınlatma	Watt	Ölçüler		
	MRK 2111	LED	10W	120(A) x 120(B) x 300(C)	. A .	. B .
	MRK 2112	LED	10W	120(A) x 120(B) x 500(C)		C
	MRK 2123	LED	10W + 10W	120(A) x 120(B) x 800(C)		

www.lampeti.com
iletisim@lampeti.com