

PRIMUM BOLLARD

Architectural Outdoor Bollard Luminaire

LAMPETI
L I G H T I N G

Power
10 W

CRI
>80

Material
Aluminum Body

Input Voltage
220-240V AC

Light Distribution
150°

Finish
Electrostatic Powder Coating

LED Type
Nichia LED

Optics
Asymmetric

Operating Temperature
-20° / +50°

Luminous Flux
1394 lm


IP Rating
IP65

Typical spacing
3-4 m


IK Rating
IK08


Color Temperature
3000K / 6500K

Polar Light Distribution

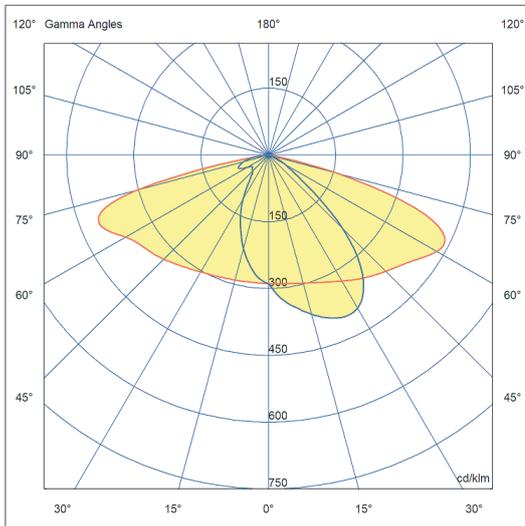

Photometric files (.ldt / .ies) available upon request

	Model Code	Lighting	Watt	Size
	PRM 2113	LED	10W	200 (A) x 100 (B) x 800 (C)
	PRM 2112	LED	10W	190 (A) x 100 (B) x 500 (C)
	PRM 2111	LED	10W	170(A) x 100 (B) x 350 (C)

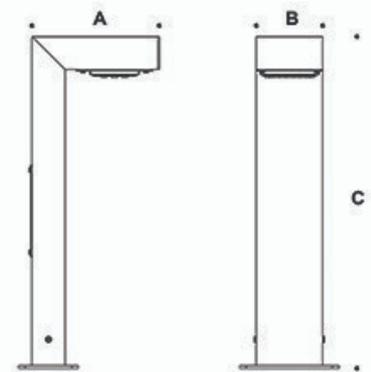

www.lampeti.com
iletisim@lampeti.com