

# PRIMUM BOLLARD

Architectural Outdoor Bollard Luminaire

**LAMPETI**  
L I G H T I N G

**Power**  
10 W

**CRI**  
>80

**Material**  
Aluminum Body

**Input Voltage**  
220-240V AC

**Light Distribution**  
150°

**Finish**  
Electrostatic Powder Coating

**LED Type**  
Nichia LED

**Optics**  
Asymmetric

**Operating Temperature**  
-20° / +50°

**Luminous Flux**  
1394 lm

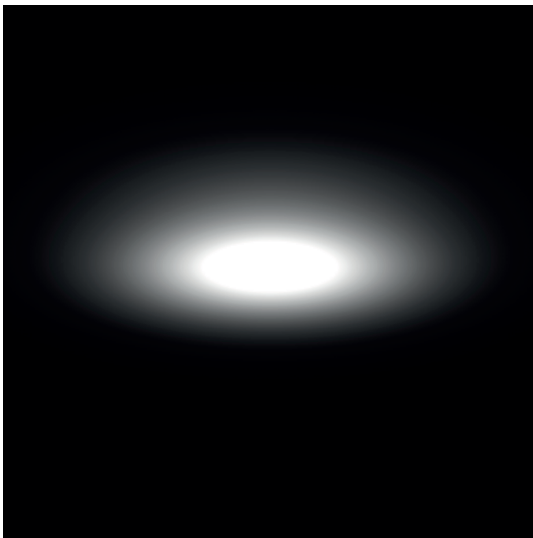
**IP Rating**  
IP65

**Typical spacing**  
3-4 m




**IK Rating**  
IK08

**Color Temperature**  
3000K / 6500K

## Polar Light Distribution



Photometric files (.ldt / .ies) available upon request

	Model Code	Lighting	Watt	Size
	PRM 2113	LED	10W	200 (A) x 100 (B) x 800 (C)
	PRM 2112	LED	10W	190 (A) x 100 (B) x 500 (C)
	PRM 2111	LED	10W	170(A) x 100 (B) x 350 (C)

