

PRIMUM POLE

Architectural Outdoor Bollard Luminaire

LAMPETI
L I G H T I N G

Power
40 W

CRI
>80

Material
Aluminum Body

Input Voltage
220-240V AC

Light Distribution
150°

Finish
Electrostatic Powder Coating

LED Type
Nichia-Osram

Optics
Asymmetric

Operating Temperature
-20° / +50°

Luminous Flux
5580 lm


IP Rating
IP65

Typical spacing
10-12 m

IK Rating
IK08

Color Temperature
3000K / 6500K

Polar Light Distribution

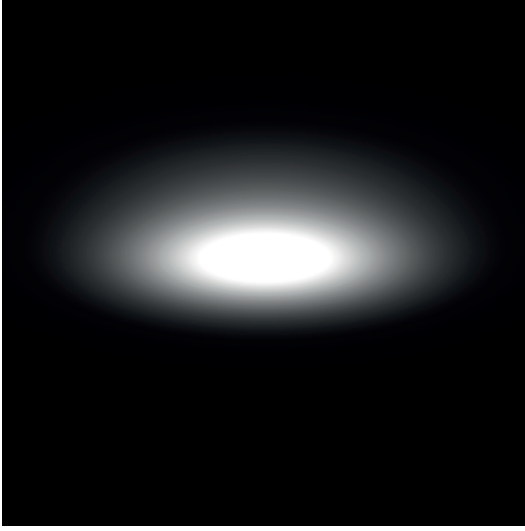

Photometric files (.ldt / .ies) available upon request

	Model Kodu	Aydınlatma	Watt	Ölçüler
	PRM 3116	LED	40W	800(A) x 150(B) x 4000(C)
	PRM 3126	LED	40W + 40W	1600(A) x 150(B) x 4000(C)
	PRM 3136	LED	40W + 40W	1400(A) x 150(B) x 4000(C)

