

TRIMA BOLLARD

Architectural Outdoor Bollard Luminaire

LAMPETI
L I G H T I N G

Power
15 W

CRI
>80

Material
Aluminum Body

Input Voltage
220-240V AC

Light Distribution
360°

Finish
Electrostatic Powder Coating

LED Type
Nichia LED

Optics
Diffuser PMMA

Operating Temperature
-20° / +50°

Luminous Flux
1344 lm


IP Rating
IP65

Typical spacing
3-4 m

IK Rating
IK05


Color Temperature
3000K / 4000K

Polar Light Distribution

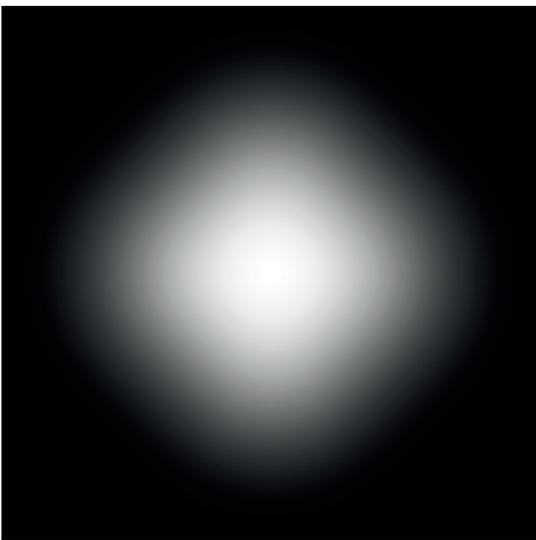

Photometric files (.ldt / .ies) available upon request

	Model Code	Lighting	Watt	Size
	TRM 2212	E27		100(A) x 100(B) x 800(C)
	TRM 2211	E27		100(A) x 100(B) x 450(C)
	TRM 2112	LED	15W	100(A) x 100(B) x 800(C)
	TM 2212	LED	10W	100(A) x 100(B) x 450(C)



www.lampeti.com
iletisim@lampeti.com