

TRIMA POLE

Architectural Outdoor Bollard Luminaire

LAMPETI
L I G H T I N G

Power
40-50 W

CRI
>80

Material
Aluminum Body

Input Voltage
220-240V AC

Light Distribution
360°

Finish
Electrostatic Powder Coating

LED Type
Nichia-Osram

Optics
PMMA

Operating Temperature
-20° / +50°

Luminous Flux
5132 - 6414 lm



IP Rating
IP65

Typical spacing
8-10 m

IK Rating
IK06

Color Temperature
3000K / 4000K

Polar Light Distribution

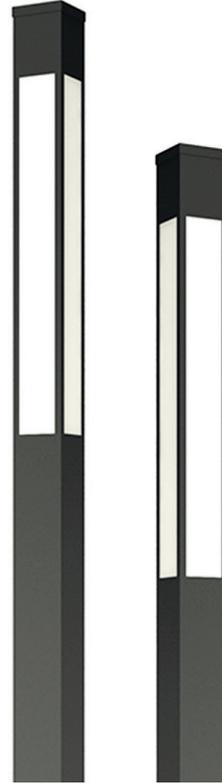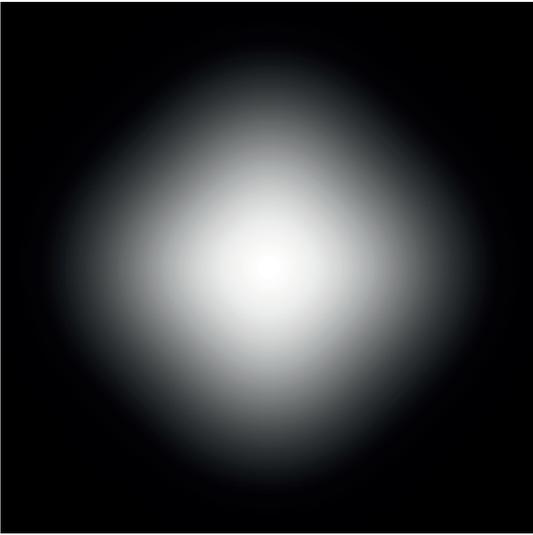

Photometric files (.ldt / .ies) available upon request

	Model Kodu	Aydınlatma	Watt	Ölçüler
	TRM 3115	LED	40W	150(A) X 150(B) X 3000(C)
	TRM 3116	LED	50W	150(A) X 150(B) X 4000(C)

