

URBAN POLE

Architectural Outdoor Bollard Luminaire

LAMPETI
L I G H T I N G

Power

40 W- 50 W

CRI

>80

Material

Aluminum Body

Input Voltage

220-240V AC

Light Distribution

120°

Finish

Electrostatic Powder Coating

LED Type

Nichia-Osram

Optics

Symmetric

Operating Temperature

-20° / +50°

Luminous Flux

5521 - 6901 lm

IP Rating

IP65

Typical spacing

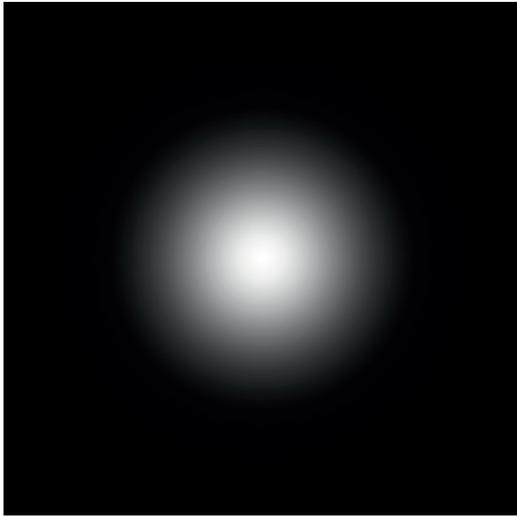
10-12 m

IK Rating

IK08

Color Temperature

3000K / 6500K

Polar Light Distribution

Photometric files (.ldt / .ies) available upon request

	Model Kodu	Aydınlatma	Watt	Ölçüler
	URB 3114	LED	40W	200(A) X 4000(B)
	URB 3115	LED	60W	200(A) X 5000(B)

